

LEGEND

1 ROWLOCK CAP (ALTERNATING)



2 BRICK

3 CONC. SLAB

4 FACE OF BUILDING

5 HVAC UNIT

6 OPENING IN WALL FOR AIRFLOW / DRAINABLE

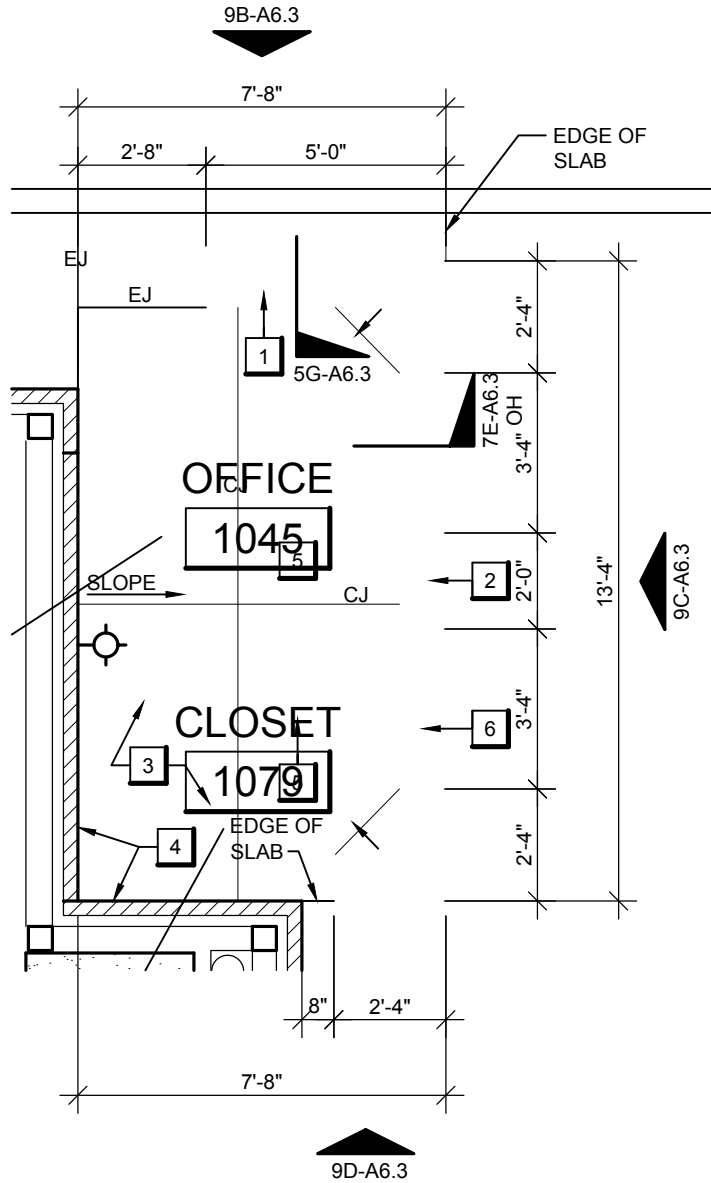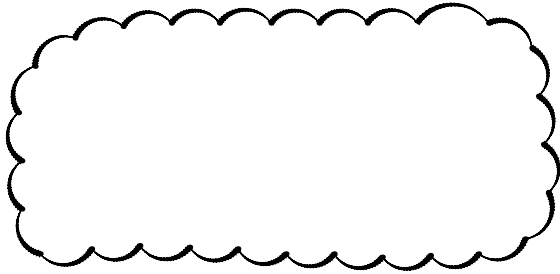

NOTE:
 1. PROVIDE EXPANSION JOINT W/ 1/2" COMPRESSIBLE FILLER AT ALL LOCATIONS BETWEEN CONCRETE PAD AND FACE OF BRICK.
 2. WHERE CONCRETE PAD MEETS THE BUILDING, PROVIDE FULL OPEN JOINT WEEPS & FLASHING AT THE FIRST BRICK COURSE ABOVE SOLDIER COURSE.

9G-A6.3 SCREEN WALL PLAN

1/4" = 1'-0"

10036P005.DWG



JOB No: 10036

BB&T HOLLY SPRINGS

LOCATION: HOLLY SPRINGS, NC

DATE: 12/16/10

